
VODA
PLUMBINGWARE

PROUDLY LEAD FREE | Master Plumbers RECOMMENDED



ONYX
Double Head Shower (Round)
VOX73R


Congratulations on your purchase of this high quality product from Voda Plumbingware.
Please read the following before installation and retain (along with your receipt) for future reference.

TECHNICAL SPECIFICATIONS

Suitable for Mains Pressure only
Minimum Pressure = 150kPa
Maximum operating Pressure = 500kPa* (As per NZ Building Code AS/NZ 3500.1)
Maximum operating Temperature = 65 deg. Celsius

INTERCHANGEABLE TOP OR BOTTOM INLET PLUMBING CONNECTION.
PRE-ASSEMBLED AS BOTTOM INLET CONNECTION.
INLET/DIVERTER ASSEMBLY CAN BE SWAPPED TO UPPER CONNECTION IF REQUIRED.

For domestic use only.

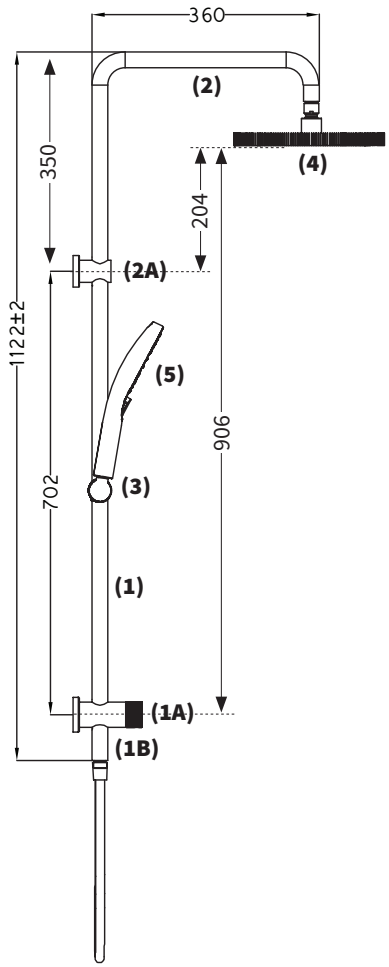

CONFIGURATION

Mains Pressure systems	Install as supplied.
Unequal Low systems	Not suitable for this water pressure.
Equal Low systems	Not suitable for this water pressure.


CONTENTS


- Shower rail **(1)** with inlet/diverter assembly **(1A)** pre-assembled as Bottom inlet connection with short lower bar **(1B)** attached.
- Upper Drencher bar **(2),** with wall connection **(2A)**.
- Adjustable Slider (handpiece holder) **(3)**
- 1.5m shower hose with flow restrictor disc fitted
- 300mm Shower drencher head **(4)**
- 3 Function ABS Shower handpiece **(5)**
- Wall fixing kit, including; plain wall fixing (7A), threaded inlet fixing (7B), spare grub screws.

INSTALLATION


***FOR PRESSURES EXCEEDING 500kPa INSTALL A PRESSURE REDUCING VALVE. THOROUGHLY FLUSH ALL PIPES TO ELIMINATE ANY REMAINING DIRT AND RESIDUE, AND INSTALL INLINE FILTERS. FAILURE TO DO SO MAY VOID THE WARRANTY. TO BE INSTALLED AS PER THE REQUIREMENTS WITH AS/NZS 3500.**

Note: This shower has a WELs certified flow regulator fitted between the shower hose and wet rail connection. If you want a greater flow, remove this disc but note that this will not give a WELS 3-star water rating anymore.

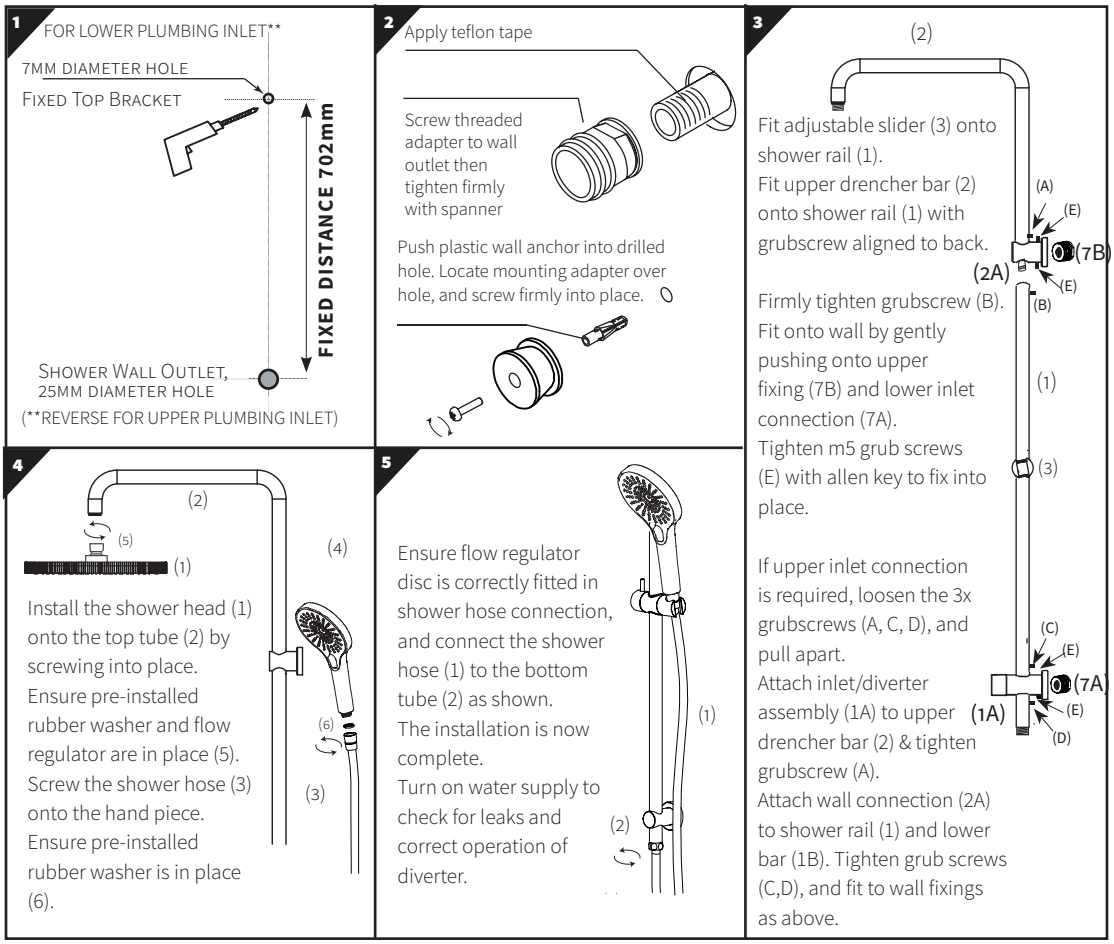



DIVERTER OPERATION



MAINTENANCE AND CARE

Should only be cleaned with mild liquid detergent or soap.
Do not use cream cleaners, as they are abrasive.
The use of unsuitable cleaning agents may damage the surface.
Any damage caused in this way will not be covered by warranty.

WARRANTY

PLEASE CALL US BEFORE REMOVING SHOWER OR UNDERTAKING ANY REPAIR WORK.

Please refer to our website for warranty information: **www.vodaplumbingware.co.nz/warranty**

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 367 366 – as unauthorised removal of the product may void the warranty.

CARE AND MAINTENANCE

SHOULD NOT BE CLEANED WITH ACIDIC, CAUSTIC/ALKALINE, ABRASIVE OR CITRIC CLEANERS.

A soft, damp cloth is recommended for cleaning (Not a Micro fibre cloth). Mild soap solutions can also be used on occasion. See website for full care instructions: **www.vodaplumbingware.co.nz/tapware-care-instructions/**

PROUD PARTNER AND SUPPORTER OF MASTER PLUMBERS, GASFITTERS AND DRAINLAYERS

Master Plumbers Representing Excellence
Master Gasfitters Representing Excellence
=
Master Drainlayers Representing Excellence